

T36FT820NS

36-INCH STAINLESS STEEL FREESTANDING FRENCH DOOR BOTTOM FREEZER

PROFESSIONAL COLLECTION HANDLES



Also Available In:
T36FT810NS – Masterpiece® Collection Handles

FEATURES & BENEFITS

- Best in class lighting: see everything with a fully illuminated back panel and adjustable theater lighting
- Dual evaporators / dual compressors
- Internal ice and water provides easy access with a clean exterior
- ThermaFresh® system, humidity and temperature controlled drawers
- Stainless steel ThermaFresh® mats included with drawers for easy cleaning

STYLE

Door Style	Stainless Steel Panel
Handle Style	Professional
Interior Finish	Illuminated Back Panel
Door Configuration	3-door

INNOVATION

Wi-Fi-Enabled for Control with Home Connect® App	Yes
Remote Monitoring and Control	Yes
Diamond Ice	Yes
Camera in the Appliance	No

PERFORMANCE

ThermaFresh® System	Yes
Dual Compressor	Yes
Dual Evaporators	Yes
Automatic Defrosting	Yes

Modes

Economy, Sabbath, Vacation, Demo, SuperCool, SuperFreeze®

Internal Water Dispenser	Yes
Water Filter (6 Months)	Yes
Air Fresh Filter	Yes
Ethylene Filter (6 Months)	Yes

CAPACITY AND STORAGE

Total Capacity (cu. ft.)	20.8
Refrigerator Capacity (cu. ft.)	14.8
Freezer Capacity (cu. ft.)	6
Tiered Freezer Storage Drawer	3 Tier
Thermafresh® Temperature & Humidity Managed Drawers	2
Thermafresh® Mats	2

ThermaFresh® Crisper Drawer Modes (° F/Humidity)

Meat/Fish (29° F/Low), Fruit (32° F/Low), Vegetables (32° F/High), Beverages (34° F/Low), Snacks/Misc. (40° F/Low)

Storage Shelves	4 Adjustable, 1 Fixed
Shelf Material	Glass w/Metal Profile
Standard Door Bins	4 Adjustable
Gallon Door Bins	2 Adjustable

GENERAL FEATURES

Full 72" Height and True Counter-Depth for Built-In Appearance	Yes
Internal Control Panel	Yes
Water Tank Capacity (oz)	30.4
Water Filter Replacement Indicator	Yes
Ice Maker with Diamond Ice System	Yes
Ice Production (24 Hrs.), Diamond Ice (lbs.)	3.5
Ice On / Off	Yes
Ice Storage Capacity (lbs.)	8.8

Lighting

LED Recessed Side Light Bars & Fully Illuminated Back Panel

Independent Cooling Systems	2
Door Alarm	Yes
Cooling System	Multi-Air-Flow
Maximum Sound Level	40 dBA
Star-K Certified Sabbath Mode	Yes
ENERGY STAR® Certified	Yes
Annual Energy Consumption	570 kWh

T36FT820NS

36-INCH STAINLESS STEEL FREESTANDING FRENCH DOOR BOTTOM FREEZER

PROFESSIONAL COLLECTION HANDLES



OPERATING TEMPERATURE

Refrigerator: 33°F (1°C) to 43°F (6°C)

Freezer: -7°F (-22°C) to 6°F (-14°C)

ThermaFresh® Drawer: 29°F (-2°C) to 40°F (4°C) 5 Preset Modes

SuperCool: 36°F (2°C) for Approximately 6 Hours

SuperFreeze®: -22°F (-30°C) for Approximately 8 Hours

INSTALLATION FEATURES

Four Point Front Adjustable with 4 Wheels Yes

Front Serviceable Yes

TECHNICAL SPECS

Required Power Supply 110-127 V, 60 Hz, 10 Amp

Plug Type 120V-3-Prong

Power Cord Length (inches) 67"

DIMENSIONS AND WEIGHT

Overall Width (Inches) 35 5/8"

Overall Height (Inches) 72"

Overall Depth (Inches) 31 7/16"

Overall Depth Without Hinges and Doors (Inches) 24"

Overall Depth With Hinges and Doors, No Handles (Inches) 28 3/4"

Required Cutout Size (HxWxD) (Inches) 72" x 36"x25"

Net Weight (Approx.) (lbs.) 326

Gross Weight (Approx.) (lbs.) 353

OPTIONAL ACCESSORIES

Replacement Water Filter REPLFLTR55

Ethylene Filter Refill (Part No.) 17005225

Ethylene Filter Starter Kit (Part No.) 17005228

Replacement Carbon Air Filter (Part No.) 10009874

90 Degree Door Stopper 10012733

WARRANTY

Limited Warranty, Parts & Labor 2 Years

SUPPLEMENTAL MATERIAL

CAD File [Click Here to Download](#)

Installation Manual [Click Here to Download](#)

Use & Care Guide [Click Here to Download](#)

Warranty [Click Here to Download](#)

Energy Guide [Click Here to Download](#)

Home Connect® Quick Start Guide [Click Here to Download](#)

T36FT820NS


36-INCH STAINLESS STEEL FREESTANDING FRENCH DOOR BOTTOM FREEZER

PROFESSIONAL COLLECTION HANDLES



CUTOUT DIMENSIONS

measurements in inches (mm)

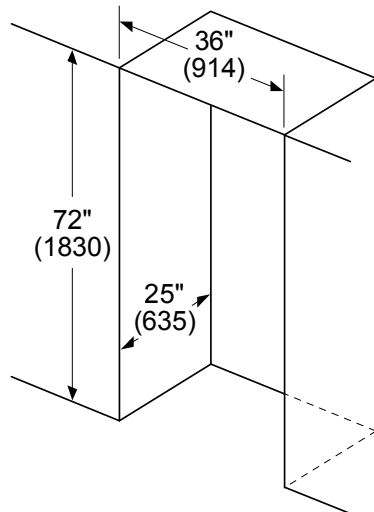


Leave ½" (12.7) gap at the top and 1" (25.4) behind the refrigerator for proper ventilation.

It is recommended that you do not install the refrigerator near a heat source such as a stove or a range.

TOP VIEW CLEARANCE

Measurements in inches (mm)

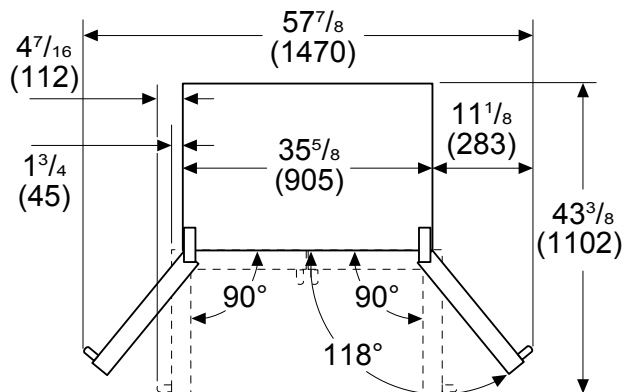

Drawers can be pulled out with door open to 90°

Drawers can be taken out with door completely opened


T36FT820NS

36-INCH STAINLESS STEEL FREESTANDING FRENCH DOOR BOTTOM FREEZER

PROFESSIONAL COLLECTION HANDLES



PRODUCT DIMENSIONS

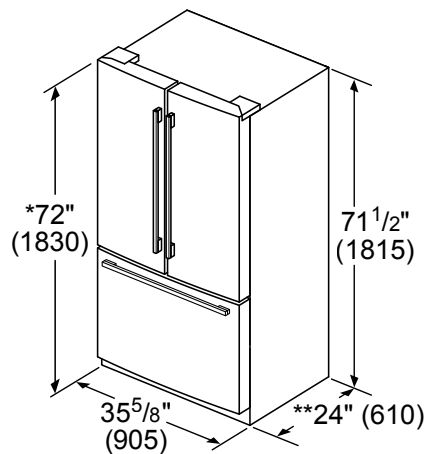


* Add $\frac{5}{8}$ " (17) with front leveling feet fully extended

** Add 1" (25) for fixed spacers on back


measurements in inches (mm)

Measurements in inches (mm)

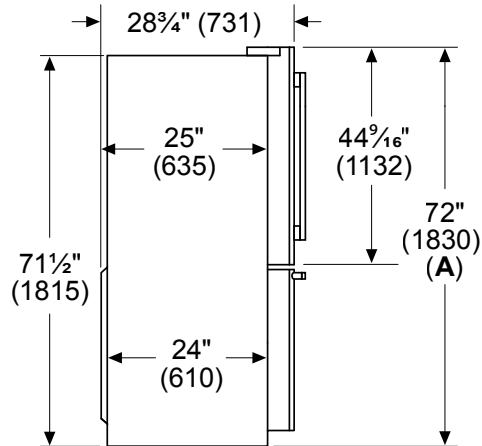

A: Add $\frac{5}{8}$ " (17) with front leveling feet fully extended

Measurements in inches (mm)

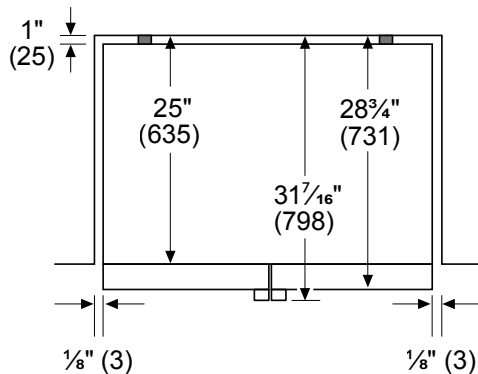

ACCESSORIES (OPTIONAL)



REPLFLTR55

Replacement Water Filter



17005228

Ethylene Filter Starter Kit



17005225

Ethylene Filter Refill



10012733

90 Degree Door Stopper



10009874

Replacement Carbon Air Filter

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

DWHD640EPR

EMERALD® DISHWASHER

CUSTOM PANEL



HomeConnect

Also Available:

DWHD640EFP – Flat Stainless Steel Panel with Professional Collection Handle

DWHD640EFM – Flat Stainless Steel Panel with Masterpiece® Collection Handle

FEATURES & BENEFITS

- Chef's Tool Drawer® (3rd Rack) is designed to make loading and unloading tools and hard to place items extraordinarily easier
- Three stage advanced filtration recirculates water for sparkling results
- 3-Level adjustable upper rack is customizable for all of your needs, designed to be raised for extra large items placed on the bottom rack, or lowered to fit taller wine glasses on the upper rack
- Extra Dry Option adds extra heat to the final rinse to enhance drying results
- Impressively Quiet—48 dBA for peaceful kitchen experience
- Use the exclusive Home Connect® app to refine your cleanup routine with remote control and receive timely notifications that keep track of every dish tab so you never run out

GENERAL PROPERTIES

Number of Wash Cycles	6 (Auto, Normal, Quick, Hand Wash, Pots & Pans, Favorite)
Additional Wash Cycles in Home Connect®	2 (Machine Care, Rinse)
Number of Options	4 (Remote Start, Sanitize, Power Boost, Extra Dry)
Additional Options in Home Connect®	1 (Save Time)
NSF®-Certified* Sanitize Option	Yes
dBA	48
Third Rack	Chef's Tool Drawer®
Rack Adjustability	Rackmatic 3-Stage
Tub Material	Stainless Steel
Concealed Water Heating Element	Yes
Leak Protection System	24/7 AquaStop®
Water Softener	No
Five-Level Wash	Yes
Childlock	No
Home Connect® (Wi-Fi Enabled)	Yes

EFFICIENCY

Water Usage Per Cycle	3.2 g
CEE Energy Efficiency Class	Tier 1
ENERGY STAR® Certified	Yes
Total Annual Energy Consumption	240 kWh
Total Annual Water Consumption	623.5 g

CAPACITY

Number of Place Settings	16
--------------------------	----

TECHNICAL DETAILS

Watts	1,440 W
Current	12 A
Volts	120 V
Frequency	60 Hz
Power Cord Length	67"
Power Cord Install Length from Corner of Unit when Facing the Door	Left - 45" Right - 56"
Minimum Water Pressure	14 (lb/sin)
Max. Temperature for Water Intake	140° F
Length Inlet Hose	N/A
Length Outlet Hose	90.5"

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD)	33 7/8" x 23 9/16" x 23 3/4"
Required Cutout Size (HxWxD)	33 7/8" Min. x 24" Min. x 24"
Adjustable Feet	Yes
Net Weight	85.1 lbs

*Certification to NSF/ANSI Standard 184 for residential dishwashers


DWHD640EPR
EMERALD® DISHWASHER
CUSTOM PANEL



WARRANTY	
Limited Warranty, Entire Appliance, Parts and Labor	2 Year
Limited Warranty for Microprocessor or Printed Circuit Board; Parts Only	3rd to 5th Year
Limited Warranty for Racks (Does Not Include Rack Components); Parts Only	3rd to 5th Year
Limited Warranty for Rust-through On Inner Tub Liner; Parts Only	Lifetime

ACCESSORIES (OPTIONAL)	
Dishwasher Installation Kit (Junction Box, 90° Elbow and Water Supply Hose)	SMZ3IN1UC
Dishwasher Supply and Drainage Hose Extension 76 3/4"	SGZ1010UC
Junction Box	SMZPCJB1UC
Cabinet Protector with Power Cord Clip	SMZEPCC1UC
Water Supply Hose	SMZSH1ABUC

DISHWASHER & CUTOUT DIMENSIONS

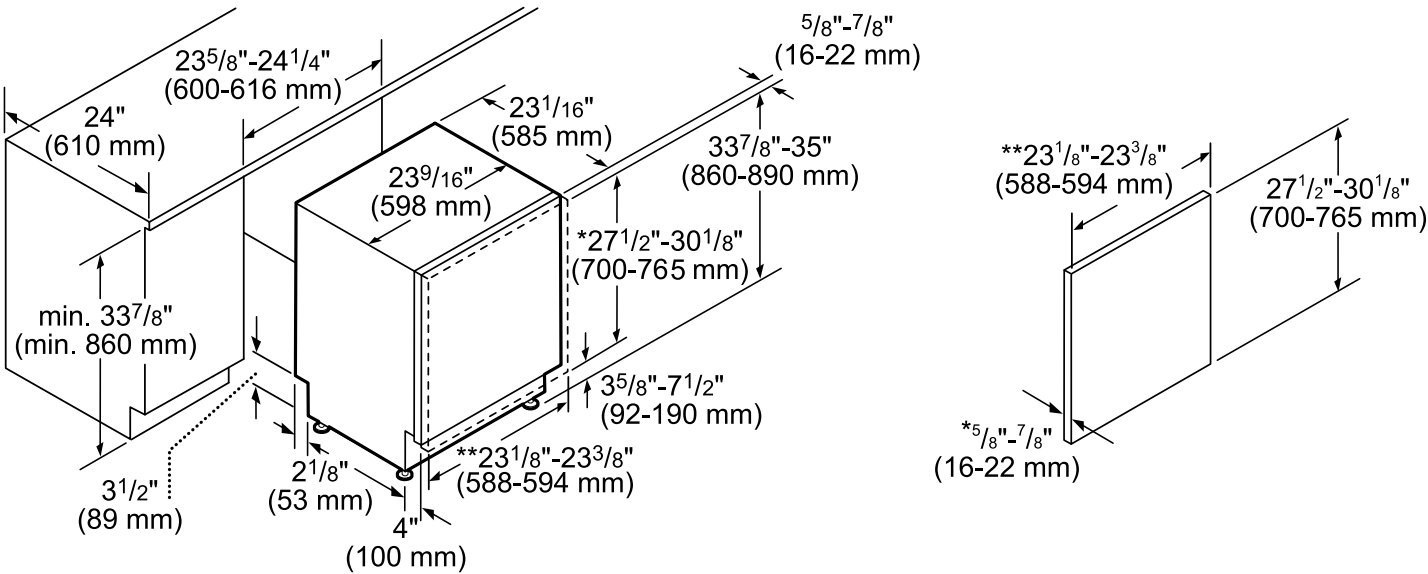

- * measured from the bottom edge of the countertop panel thickness
recommended 3/4" (20 mm) panel weight 11–18 lb. (5–8 kg)
- ** 24" (610 mm) wide panel may be used depending on cabinet design

measurements in inches and mm

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

PRG366WH

36-INCH GAS PRO HARMONY® RANGE

PROFESSIONAL COLLECTION, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE



HomeConnect

FEATURES & BENEFITS

- ★ - Exclusive Star® Burner delivers superior flame spread for more even heating with QuickClean Base® designed for easy cleaning
- ★ - 2 ExtraLow® burners offer precision simmering, melting or keeping warm
- Includes three Full Access® telescopic racks, all with an integrated easy-grip handle
- Powerful, 20,500 BTU bake and 17,500 BTU broil burners
- Convection Bake offers precise multi-level baking results


TECHNICAL DETAILS

Circuit Breaker	15 A
Volts	120 V, 60Hz
Energy Source	Gas
Plug Type USA	120V – 3 Prong
Power Cord Length	65" (1,651mm)
Gas Supply	3/4"

WARRANTY

Limited Warranty, Entire Appliance, Parts and Labor	2 Year
---	--------

RANGETOP

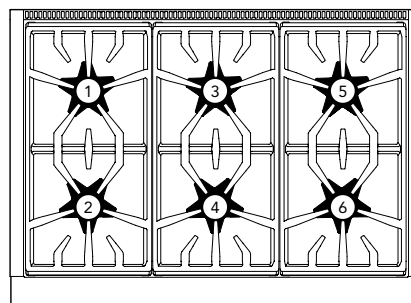

Total number of cooktop Burners	6
1 – Power of Back Left Burner BTU	15,000 and XLO
2 – Power of Front Left Burner BTU	18,000 and XLO
3 – Power of Back Center Burner BTU	15,000
4 – Power of Front Center Burner BTU	18,000
5 – Power of Back Right Burner BTU	15,000
6 – Power of Front Right Burner BTU	18,000

OVEN

Oven Capacity	5.1 cu. ft.
Cooking Modes	Bake, Convection Bake, Roast, Broil
Sabbath	Yes
Self Clean	No
Telescopic Rack(s)	3
Interior Lights	2
Bake Power	20,500 BTU
Broil Power	17,500 BTU
Home Connect® (Wi-Fi Enabled)	Yes
Cavity Interior Dimensions (HxWxD)	16 3/8" x 29 1/8" x 18 5/8"
Cavity Usable Dimensions (HxWxD)	11 1/4" x 25 5/8" x 16 3/4"

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD)	35 3/4" – 36 3/4" x 35 15/16" x 24 3/4"
Required Cutout Size (HxWxD)	35 3/4" – 36 3/4" x 36" x 24"
Net Weight	415 lbs.

SEE PAGE 2 FOR INCLUDED AND OPTIONAL ACCESSORIES

PRG366WH

36-INCH GAS PRO HARMONY® RANGE

PROFESSIONAL COLLECTION, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE



ACCESSORIES (INCLUDED)

3 Telescopic Racks, Meat Probe, Island Trim

ACCESSORIES (OPTIONAL)



PWOKRINGHC

Wok Ring



PAGRIDDLE

Professional Griddle, Sits on Top of Grates Over 2 Star Burners, High-Release Coating



PARKB3XHY

Metallic Blue Knob Kit



PA12CHPBLK

Chopping Block / Cutting Board



PA36WLBH

Pro Harmony 7" Low Backguard*



PALPKITGA

LP Conversion Kit, Pro Harmony Gas Models with 4 and 6 Burners

PAALTKITH

High Altitude Kit, Natural Gas or Dual-Fuel Pro Harmony Ranges, 5,400 ft. to 10,200 ft.

[Contact Customer Support](#)

High Altitude Kit, Gas or Dual-Fuel Pro Harmony Ranges Connected to LP Gas, 10,000 ft. to 10,200 ft.

*Models PCG305xx, PRD305xx, PRD606xx, PRG305xx, PRG304xx and PRD304xx are suitable for 0" rear clearance to combustible surfaces. All other models: when using the included Island Trim a minimum 6" (152 mm) rear clearance is required to a combustible surface. When installing against a combustible surface, a Thermador® Low Backguard is required for a 0" rear clearance to the combustible surface. A Thermador Low Backguard must be purchased separately. A rear clearance to a surface covered in a noncombustible material (metal, ceramic tile, brick, marble, or stone) is 0" when using the included Island Trim. Clearances of less than 6" (152 mm) should be approved by the local codes and/or by the local authority having jurisdiction. Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA.


PRG366WH

36-INCH GAS PRO HARMONY® RANGE


PROFESSIONAL COLLECTION, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE



36-INCH RANGE DIMENSIONS

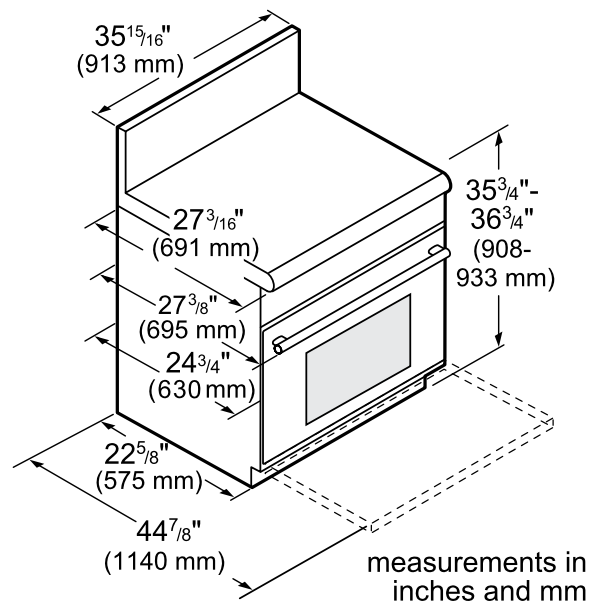

36-INCH RANGE CUTOUT DIMENSIONS

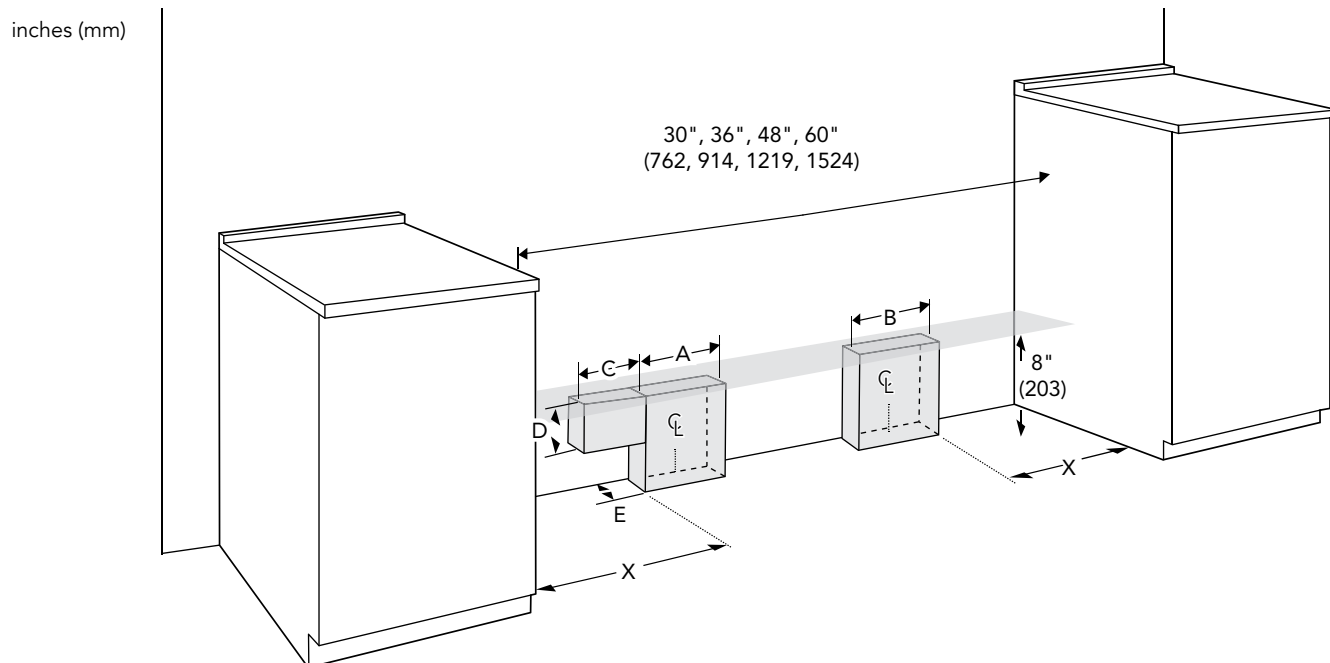

Range model	Gas zone A	Electric zone B	X	C	D	E
All Harmony series	4" (102)	6" (152)	5" (127)	N/A	N/A	2" (51)
36"/ 48" Grand series	4" (102)	6" (152)	8" (203)	4" (102)	3" (76)	2" (51)
60" Grand series	4" (102)	6" (152)	8" (203)	4" (102)	3" (76)	1" (25)

PRG366WH


36-INCH GAS PRO HARMONY® RANGE

PROFESSIONAL COLLECTION, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE



36-INCH RANGE DIMENSIONS AND CLEARANCE REQUIREMENTS WITH "LOW BACK"

NOTE: A 36-inch minimum clearance is required between the top of the cooking surface and the bottom of an unprotected cabinet. A 30-inch clearance can be used when the bottom of the wood or metal cabinet is protected by not less than 1/4 inch of a flame retardant material covered with not less than No. 28 MSG sheet steel, 0.015 inch (0.4 mm) thick stainless steel, 0.024 inch (0.6 mm) aluminum, or 0.020 inch (0.5 mm) thick copper.

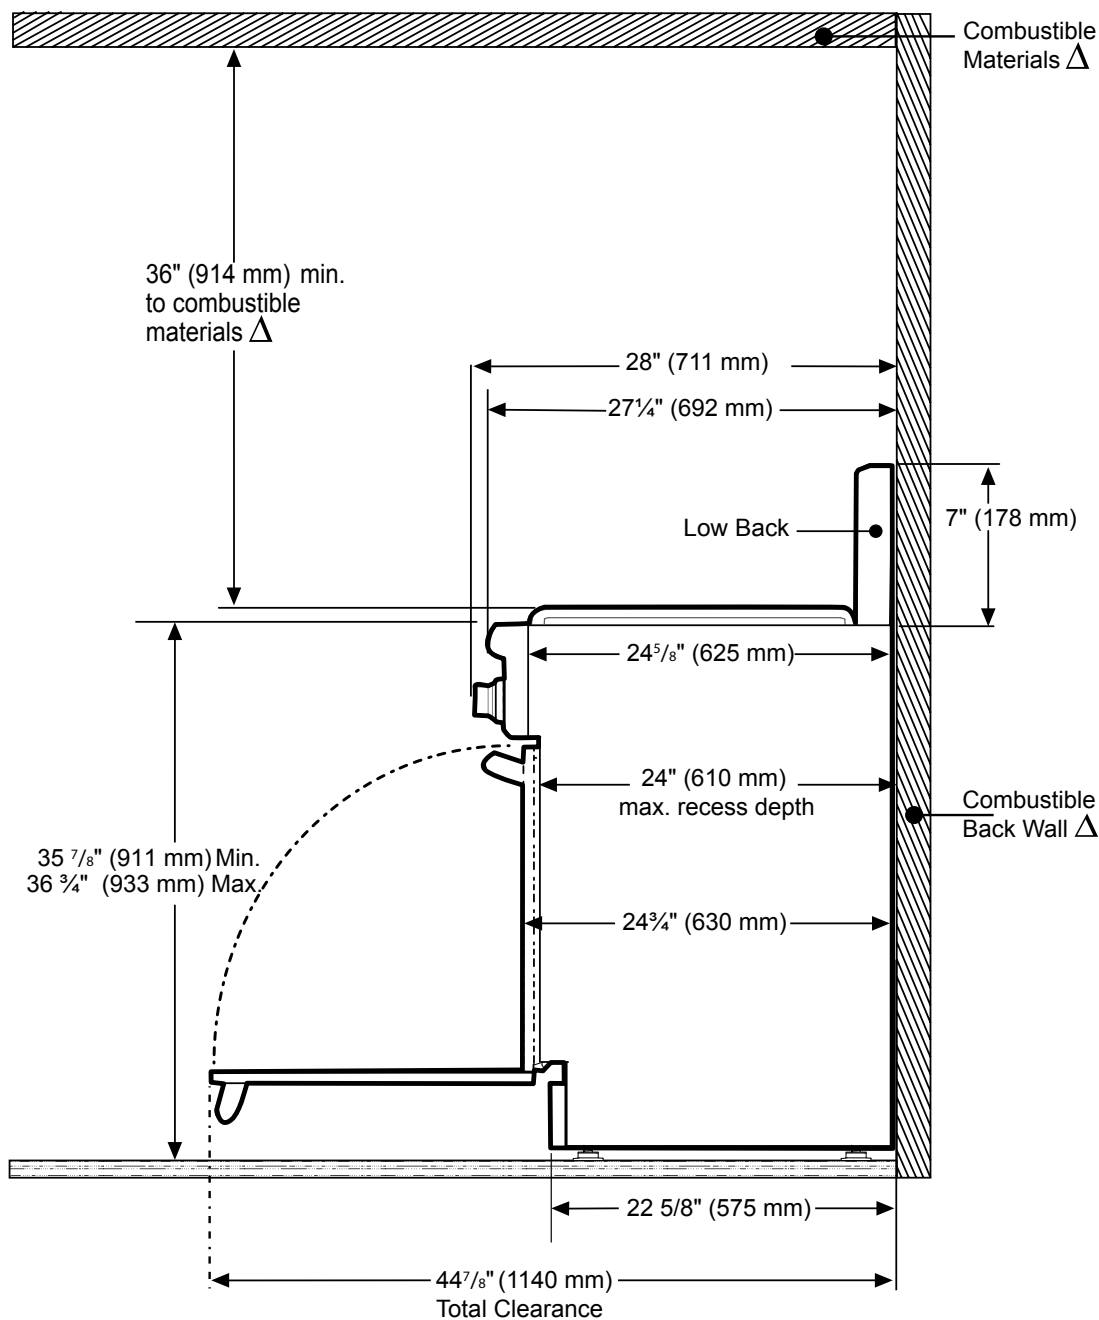

Δ As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 6" (152 mm) must be approved by the local codes and/or by the local authority having jurisdiction.


PRG366WH

36-INCH GAS PRO HARMONY® RANGE

PROFESSIONAL COLLECTION, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE



36-INCH RANGE DIMENSIONS AND CLEARANCE REQUIREMENTS WITH "FLUSH ISLAND TRIM"

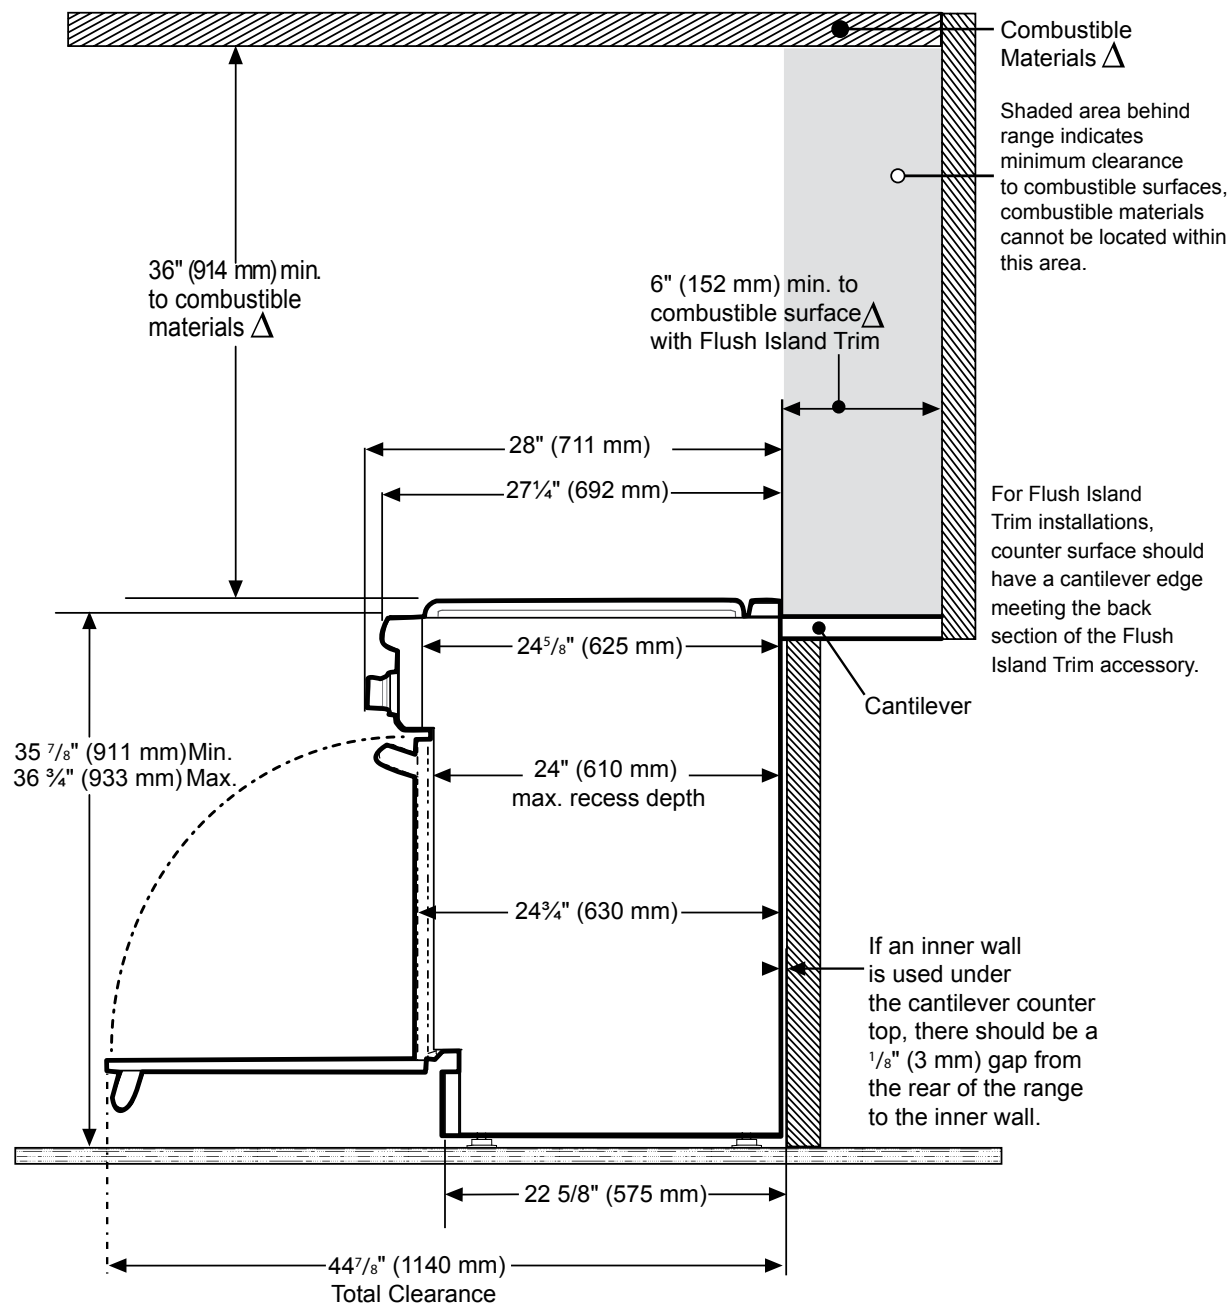

Δ As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 6" (152 mm) must be approved by the local codes and/or by the local authority having jurisdiction.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

MD24BS

24-INCH MICRODRAWER® MICROWAVE

MASTERPIECE® & PROFESSIONAL COLLECTION



FEATURES & BENEFITS

- Easy touch to automatic “open” and “close” enables hands-free operations
- Concealed drop-down panel effortlessly opens to a convenient 60° angle for easy readability and operation
- Spacious and easy to clean enameled cavity with 1.2 cu. ft. interior fits a 20 oz. cup or a 13" x 9" pan
- Achieve a perfectly flush installation in any standard depth cabinetry
- Sensor Cooking is designed to effortlessly manage humidity levels, automatically adjusting cooking time and intensity for optimal results every time
- 10 versatile Microwave Programs, including melt, warm, and soften to accomplish culinary tasks of all sizes with ease

GENERAL PROPERTIES	
Cavity Color	White
Microwave Power	950 W
CAPACITY	
Cavity Capacity	1.2 cu. ft.
TECHNICAL DETAILS	
Watts	1,500 W
Circuit Breaker	15 A
Volts	120 V
Frequency	60 Hz
Plug Type	120V-3 Prong
Power Cord Length	48"
DIMENSIONS & WEIGHT	
Overall Appliance Dimensions (HxWxD)	16 5/16" x 23 7/8" x 23 3/8"
Required Cutout Size (HxWxD) – Standard Install	15 9/16" x 22 1/8" x 23 1/2"
Required Cutout Size (HxWxD) – Flush Install	16 5/8" x 24 3/16" x 23 1/2"
Net Weight	74 lbs.
WARRANTY	
Limited Warranty, Entire Appliance, Parts and Labor	2 Year



†To be fully ADA compliant, these units must be installed according to ADA guidelines. Please check current ADA requirements for guidance on installation.

MD24BS
24-INCH MICRODRAWER® MICROWAVE
MASTERPIECE® & PROFESSIONAL COLLECTION



PRODUCT DIMENSIONS

Measurements in inches (mm)

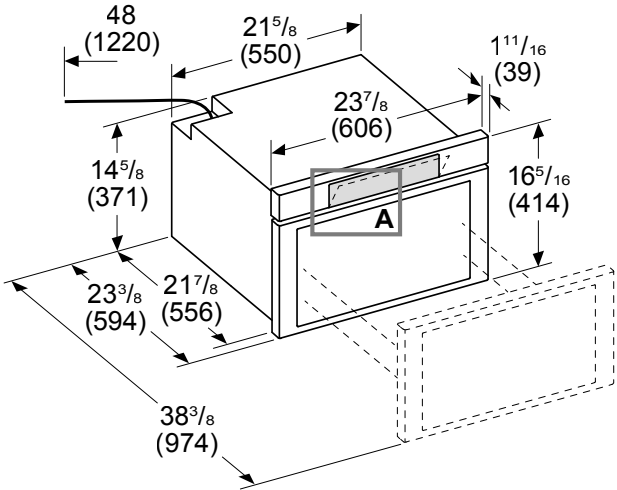



MD24BS

24-INCH MICRODRAWER® MICROWAVE

MASTERPIECE® & PROFESSIONAL COLLECTION



STANDARD INSTALLATION

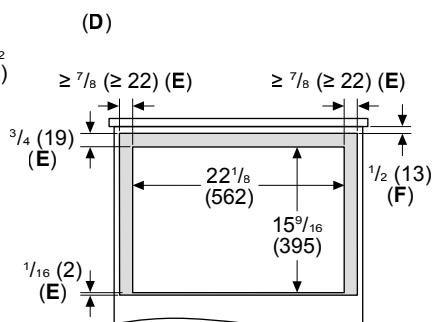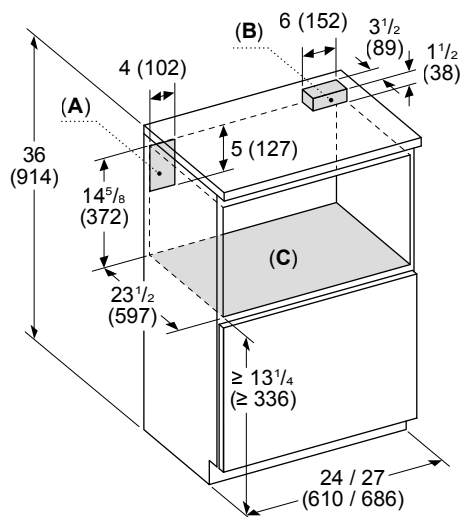

A: Recommended location of electrical outlet

B: Anti-tip block

C: Base should support up to 100 lb

D: Front view of cut-out



E: Overlap

F: Visible area

If under a counter, minimum clearance to counter top should be $\frac{7}{16}$ " (11 mm)

Measurements in inches (mm)

FLUSH INSTALLATION

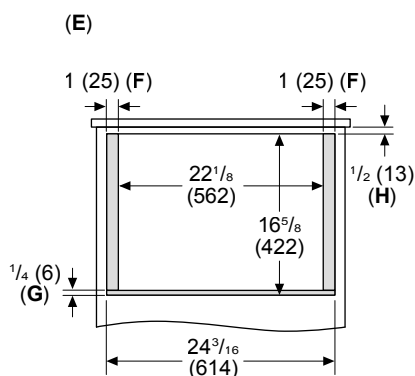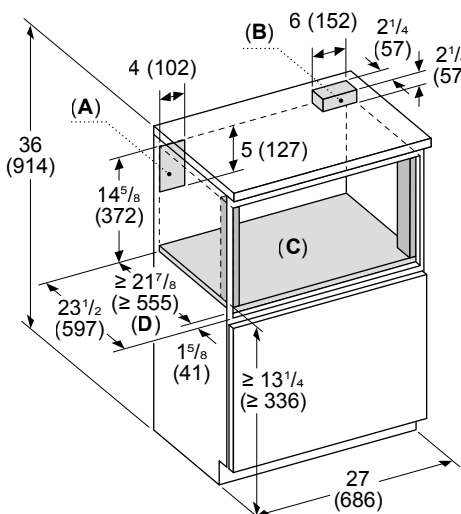

A: Recommended location of electrical outlet

B: Anti-tip block

C: Base should support up to 100 lb

D: Base depth

E: Front view of cut-out

F: Sides should be finished and extend back to cleat

Cleats should also be finished, as they may be visible after installation

G: Base thickness

H: Visible area

If under a counter, minimum clearance to counter top should be $\frac{7}{16}$ " (11 mm)

Measurements in inches (mm)

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

ACT™


	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*	
Min. - Max. CFM	200 - 600	200 - 390	200 - 290
Min. - Max. Sones	1 - 6	*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.	




Stainless Steel




Black Stainless Steel

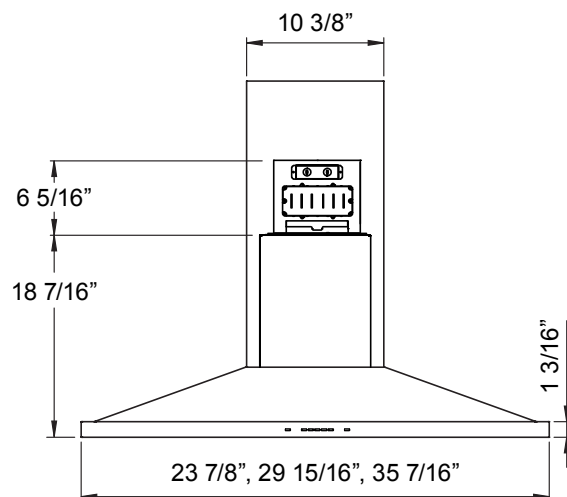

FRONT

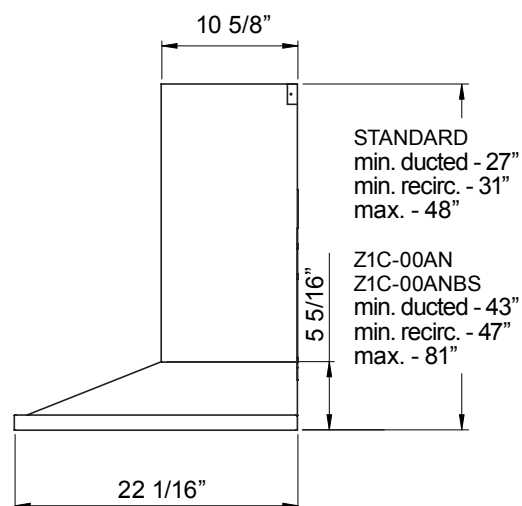

SIDE

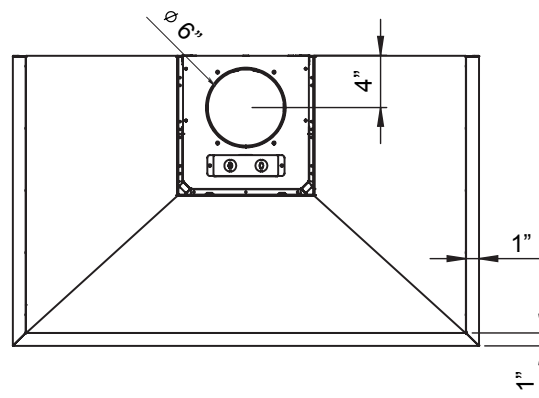

TOP

MODEL

Black Stainless Steel

Stainless Steel

Size

ZAN-E24DS

24"

ZAN-E30DBS

ZAN-E30DS

30"

ZAN-M90DBS

ZAN-M90DS

36"

BLOWER PERFORMANCE

Blower CFM (Min. - Max.)

200 - 600

200 - 600

200 - 600

Sones (Min. - Max.)

1 - 6

1 - 6

1 - 6

ACT 390 CFM (Min. - Max.)

200 - 390

200 - 390

200 - 390

ACT 290 CFM (Min. - Max.)

200 - 290

200 - 290

200 - 290

FEATURES

ACT™ Technology

390, 290

390, 290

390, 290

Controls

ICON Touch®

ICON Touch®

ICON Touch®

Speed Levels

5*

5*

5*

Auto Delay-Off

Yes

Yes

Yes

Lighting

LumiLight LED, 6W x1

LumiLight LED, 6W x2

LumiLight LED, 6W x2

Dual-Level Lighting

Yes

Yes

Yes

Filters

Aluminum Mesh x1

Aluminum Mesh x2

Aluminum Mesh x2

Recirculating Option

Yes

Yes

Yes

Duct Cover Extension Option

Yes, Up to 12' Ceiling

Yes, Up to 12' Ceiling

Yes, Up to 12' Ceiling

ADA Compliant

Yes, w/ remote accessory

Yes, w/ remote accessory

Yes, w/ remote accessory

DUCT SPECIFICATIONS

Vertical Internal Blower

6" Round

6" Round

6" Round

Horizontal Internal Blower

NA

NA

NA

AC POWER

120V, 60Hz at Max. 4A

120V, 60Hz at Max. 4A

120V, 60Hz at Max. 4A

OPTIONAL ACCESSORIES

Wireless Remote Control Kit

RC-0002

RC-0002

RC-0002

Recirculating Kit

ZRC-01AN

ZRC-01AN

ZRC-01AN

Duct Cover Extension

Z1C-00AN (SS)

Z1C-00ANBS (Black SS)
Z1C-00AN (SS)Z1C-00ANBS (Black SS)
Z1C-00AN (SS)

Stainless Steel Telescopic Backsplash

NA

AK1710

NA

Make-Up Air Kit

MUA006A

MUA006A

MUA006A

Hybrid Baffle Filter Kit (2 filters)

Z0F-B002

Z0F-B002

Z0F-B002

MOUNTING HEIGHT RANGE**

24" - 34"

24" - 34"

24" - 34"

WARRANTY

3 years parts, 1 year labor

3 years parts, 1 year labor

3 years parts, 1 year labor

CEILING HEIGHT		8'	8.5'	9'	9.5'	10'	10.5'	11'	12'
STANDARD DUCT COVER	Ducted Mounting Height***	24" - 33"	24" - 34"	24" - 34"	29.5" - 34"	NA	NA	NA	NA
	Recirc Mounting Height***	24" - 29"	24" - 34"	24" - 34"	29.5" - 34"	NA	NA	NA	NA
DUCT COVER EXTENSION	Ducted Mounting Height***	NA	NA	24" - 29"	24" - 34"	24" - 34"	24" - 34"	24" - 34"	27" - 34"
	Recirc Mounting Height***	NA	NA	24" - 25"	24" - 31"	24" - 34"	24" - 34"	24" - 34"	27" - 34"

*When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 4 speeds and ACT 290 CFM = 3 speeds.

**Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

ACT™ Airflow Control Technology™ (ACT™)

is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

MAR23.0101

